

CAE PERFORMANCE PRODUCTS PTY. LTD.

A.B.N. 37 340 926 183

7 MAIN ROAD, CASTLEMAINE, VIC.3450.

TELEPHONE: (03) 54721442 - FAX: (03) 54724111

Email: info@caenterprises.com.au Website: www.caenterprises.com.au

WIPER KIT COMPONENT LIST

Wiper Motor and Mounting Bracket Assembly
Motor Link.
Wiring Loom, Switch and In Line Fuse
Customer Instructions

Fitting Instructions

International Wiper Installation Instructions

Thank you for purchasing our Conversion Kit, instructions for fitment are as follows.

- 1 Remove wiper arms from Windscreen.
Remove original motor assembly and switch in dash.
- 2 Fit 2 Speed motor mount on firewall utilizing the two original mounting Post holes
- 3 Fit 2 speed switch in appropriate hole and install wiring loom supplied.
- 5 Connect Red feed wire through Fuse supplied to suitable Ignition Feed Wire on Ignition Switch of vehicle.
- 6 Connect the Brown wire to suitable earth location on the vehicle.
- 7 Activate power and check wiper for under dash clearance. Eg. Speaker wires, wiring, demister ducts, brake/clutch pedal assembly, bracing.
- 8 Self park the motor with switch and fit the windscreen Arms and Blades in the park position. Double check for rotation Clearances. If the Park position needs adjustment, this is done by removing the Motor from its bracket (3 bolts) and with a ¼ drive 10mm extension socket, undo the motor crank tube and rotate this to the position required on the splined motor shaft. Tighten the shaft nut again, reassemble and check self park position. (Note the motor is set at the self park position at the factory and it is rare you will need to make any adjustments to the Park Position).

CAE PERFORMANCE PRODUCTS PTY. LTD.


A.B.N. 37 340 926 183

7 MAIN ROAD, CASTLEMAINE, VIC.3450.

TELEPHONE: (03) 54721442 - FAX: (03) 54724111

Email: info@caenterprises.com.au Website: www.caenterprises.com.au

WIPER MOTOR LOOM PINOUTS

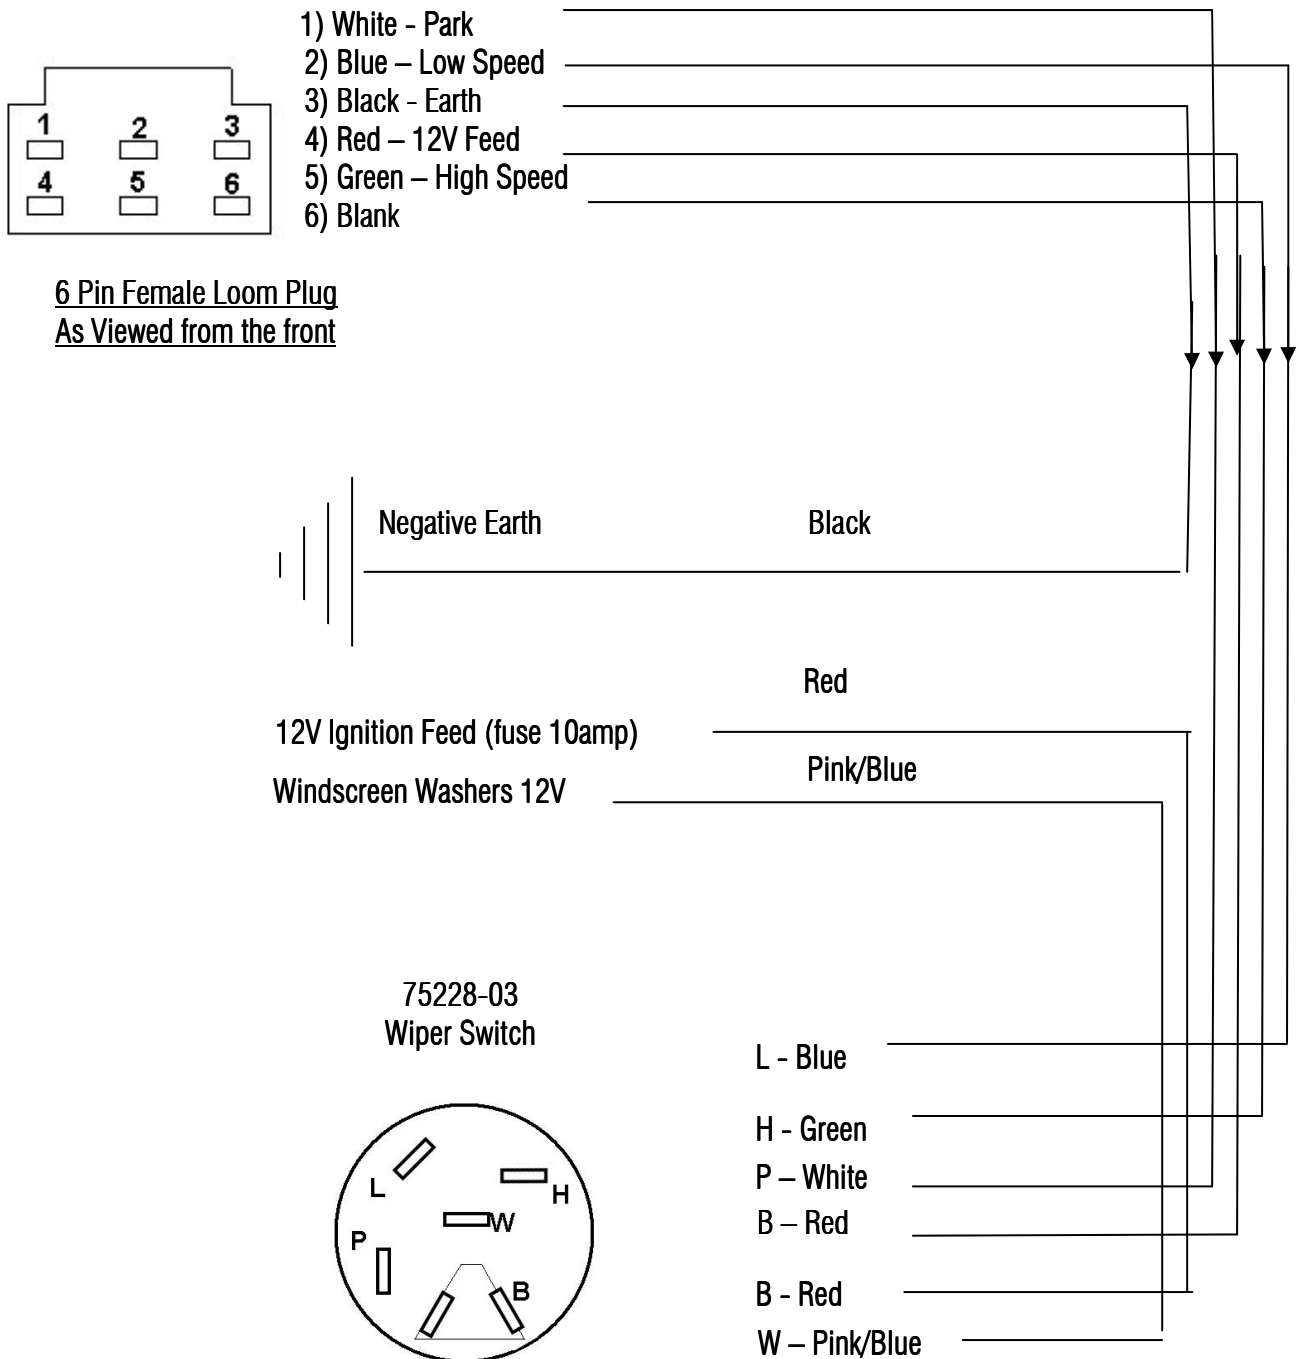

Wiper switch system is 12V Positive Feed